

Tech Specs

UniFi **UISP** Branding

60 GHz Wireless

Wireless

Fiber

Wired


Accessory Tech

Fiber > [Fiber OLT XGS](#)

Datasheet

Marketing Images

Installation Guide

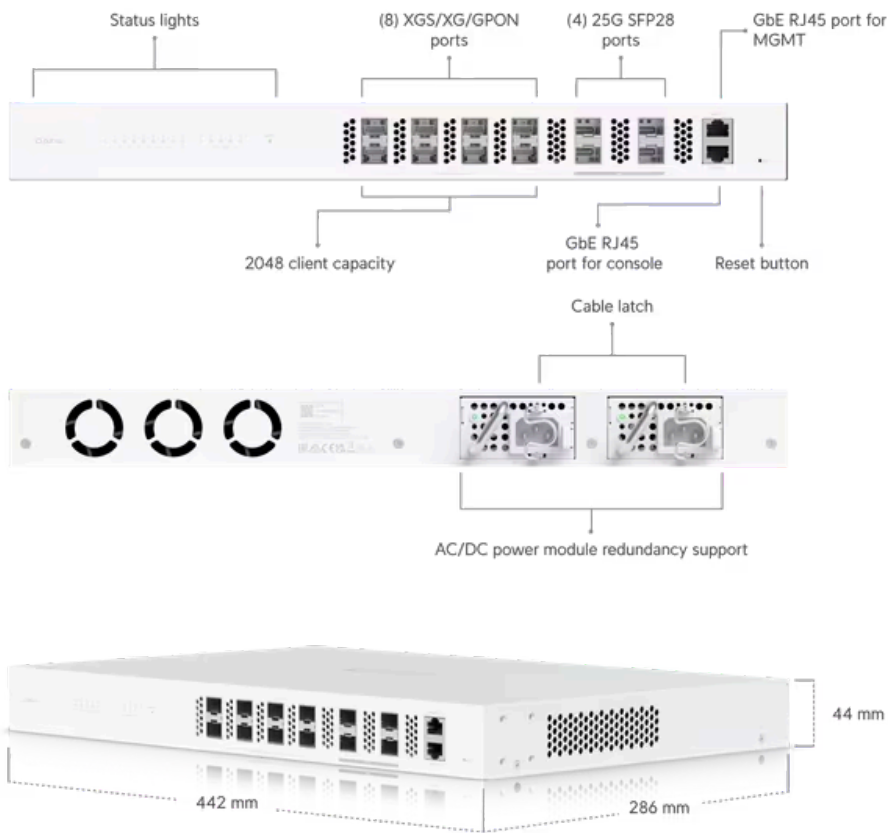

Mechanical

Dimensions	442.4 x 285.6 x 43.7 mm (17.4 x 11.2 x 1.7")
Weight	5.29 kg (11.7 lb)
Enclosure material	SGCC steel

Networking interface	(8) XGS/XG/GPON ports (4) 1/10/25G SFP28 ports* *The four SFP28 ports don't support mixed speed at 25 Gbps mode. Once one of the SFP28 ports is configured at 25 Gbps mode, the others will be limited at 25 Gbps too. The SFP28 ports only support mixed speed when all ports are at 1 Gbps or 10 Gbps.
Management interface	Ethernet out-of-band Ethernet in-band RJ45 serial console port Bluetooth
Memory	512 MB DDR3
Onboard flash storage	64 MB NOR + 512 MB NAND
Power method	(1) Universal AC input, 100-240V AC, 50/60 Hz
Power supply	(2) Hotswap AC/DC PSU
Supported voltage range	100-240V AC
Max. power consumption	70W
Button	(1) Factory reset
Ambient operating temperature	-10 to 45° C (14 to 113° F)
Ambient operating humidity	10 to 95% non-condensing
Certifications	CE, FCC, IC

LEDs

System	Slow blinking white: system is booting Fast blinking white: reset to default Blinking white/blue: system is upgrading Slow blinking blue: system is connecting to UISP Fast blinking blue: locate system Steady white: system is ready Steady blue: system is ready and connected to UISP
MGMT port	(1) White, steady on after link is up
PON ports	(8) Steady white: PON link
SFP28 ports	(4) White, steady on after link is up

[Compliance Information](#)

Stay in Touch



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.